



## BRC770C90010 AMBA receiver

### 1.1 Description

Miniature balanced-armature receiver with magnetic-radiation shielding for use in BTE (Behind the Ear) and headset as a woofer.


Name:	Hornet Series AMBA Receiver
Part Number:	BRC770C90010 REV A

### 1.2 Construction Specification



Weight: 0.58 g

Mechanical dimension: please refer to the drawing below

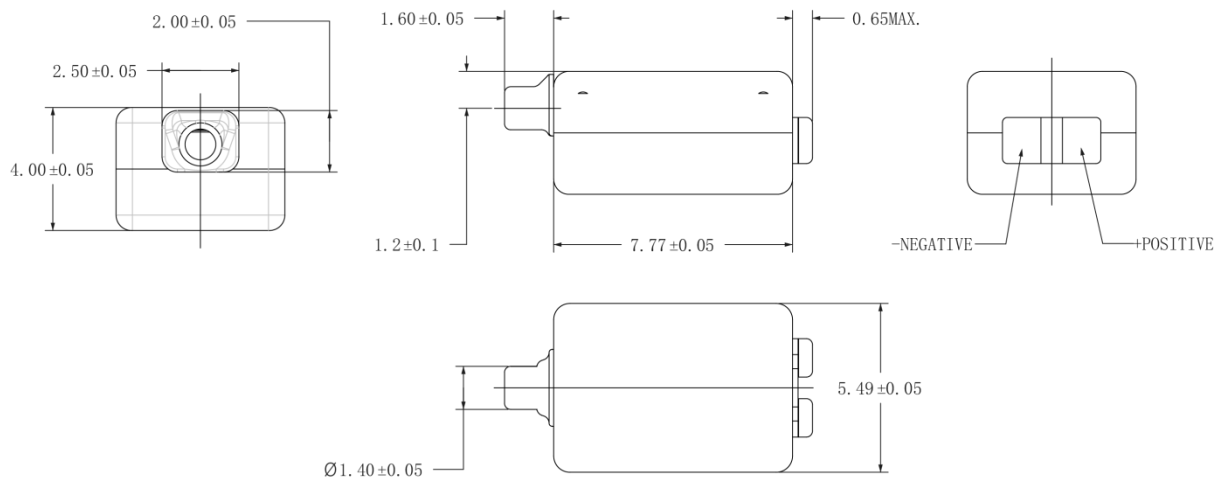

\*A positive voltage applied to the negative terminal (-) will result in an increase in pressure at the sound outlet.

### 1.3 Features & Benefits

- Perfect package size for BTE , headset applications
- Outstanding efficiency
- Substantial maximum output
- Magnetic-radiation shielded
- Optimized mechanical shock resistance

### 1.4 Electro-acoustic Specifications

#### Test condition

- Acoustic tubing: 10.0mm of 1.0mm diameter tubing
- Acoustic coupler: IEC711 coupler
- Constant voltage drive: 0.125V RMS
- Environment: 23°C, RH 50%

#### Acoustic Parameter I

Test Item		Nominal	Tolerance	Comments
Sensitivity(dB)	@200Hz	117.0	+/- 3.0	
	@500Hz	115.0	+/- 3.0	
	@1000Hz	115.5	+/- 3.0	
Peak1	Frequency (Hz)	1800	+/- 350	
	SPL(dB)	124.5	+/- 3.0	
Peak2	Frequency (Hz)	3350	+/- 500	
	SPL(dB)	120.0	+/- 3.0	
Maximum output @ Peak frequency (dB)		137.0	N/A	THD<10%


#### Acoustic Parameter II

Test Item		Nominal	Comments
THD(%)	@1/2 1 <sup>st</sup> peak	<5.0	
	@1/3 1 <sup>st</sup> peak	<5.0	
	@500Hz	<5.0	

Electric Parameter

Test Item	Nominal	Tolerance	Comments
Impedance( $\Omega$ )	@500Hz	16	+/- 15%
	@1000Hz	28	+/- 15%
DCR( $\Omega$ )	10.0	+/- 10%	

Nominal Frequency Response Curve

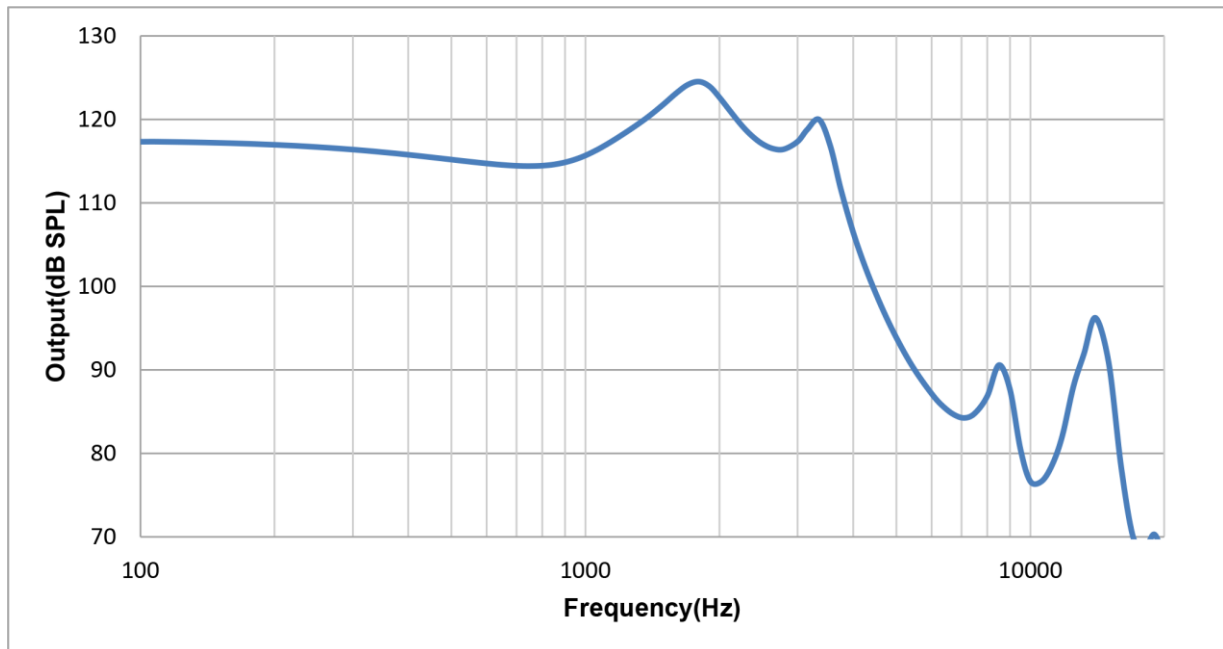

1.5 Package and Storage Condition

- Package: PET bubble pack, 1 pcs per bubble, 100 pcs per pack
- Storage temperature range: -40°C ~ 60°C
- Storage humidity range: <60%